

< GaN HEMT for satellite communication (SATCOM) earth station >

MGFK48G2732A

Ku band internally matched power GaN HEMT

12.75 - 13.25 GHz BAND / 70W Multi-carrier operable

DESCRIPTION

The MGFK48G2732A, GaN HEMT with an N-channel schottky gate, is designed for Ku-band applications with multi-carrier operation.

FEATURES

- High voltage operation : VDS=24V
- High output power : Po=48.3dBm (TYP.) @Pin=42dBm
- High efficiency : PAE=31% (TYP.) @Pin=42dBm
- Wide offset frequency : Up to 400MHz
- Designed for use in Class AB linear amplifiers

APPLICATION

- Amplifier for Ku-band SATCOM

QUALITY

- General & Industrial

Packaging

- Individual case

RECOMMENDED BIAS CONDITIONS

- Vds=24V • Ids=1.44A • Rg=13.3Ω


Absolute maximum ratings (Ta=25°C)

| Symbol | Parameter | Ratings | Unit |
|--------|----------------------------|-------------|------|
| Vgso | Gate - Source Voltage | -10 | V |
| Vds | Drain - Source Voltage | 27 | V |
| IGF | Forward Gate Current | 100 | mA |
| IGR | Reverse Gate Current | -24 | mA |
| τ | Screw Torque | 49 | N·cm |
| PT*1 | Total Power Dissipation | 225 | W |
| Pin | Input Power | ≤44 | dBm |
| Tch | Channel Temperature | 250 | °C |
| Tstg | Storage Temperature | -55 to +125 | °C |
| Tc | Case Operating Temperature | 100 | °C |

*1:Tc=25°C

Recommended operating Condition

| Symbol | Parameter | Limit | Unit |
|--------|----------------------------|-------|------|
| Tc | Case Operating Temperature | 85 | °C |
| Vds | Drain - Source Voltage | 24 | V |
| IDQ | Drain Quiescent Current | 1.44 | A |
| Rg | Gate Resistance | 13.3 | Ω |

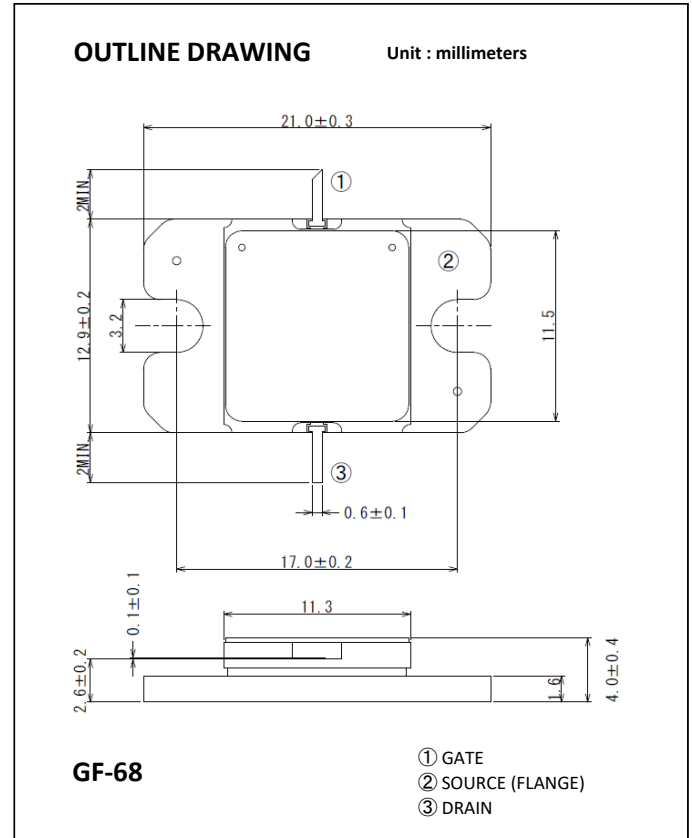

< GaN HEMT for satellite communication (SATCOM) earth station >

MGFK48G2732A

Ku band internally matched power GaN HEMT

12.75 – 13.25 GHz BAND / 70W Multi-carrier operable

Electrical characteristics (Ta=25°C)

| Parameter | Symbol | Test conditions | Limits | | | Unit |
|--------------------------------------------------|--------------|---------------------------------------------------------------------------------------------------------------|--------|------|------|------|
| | | | Min. | Typ. | Max. | |
| Pinch-off Voltage | VGS(off) | Vds=24V, ID=28.8mA | -1 | - | -5 | V |
| Output Power | Pout *2 | Vds=24V, IDQ=1.44A | 47.3 | 48.3 | - | dBm |
| Power Added Efficiency | PAE *2 | f=12.75, 13.00, 13.25GHz | - | 31 | - | % |
| Linear Power Gain | GLP *3 | *2 : Pin=42dBm *3 : Pin=27dBm | 9 | 11 | - | dB |
| 3 rd Order Intermodulation distortion | IM3 | Two-tone Test, Po=39.3dBm (Single Carrier Level) Δ f=5MHz(IM3), Δ f=200MHz(IM3-2), Δ f=400MHz(IM3-3) | -25 | - | - | dBc |
| | IM3-2 | | -24 | - | - | |
| | IM3-3 | | -24 | - | - | |
| Thermal Resistance | Rth(ch-c) *4 | Δ Vf method | - | 0.8 | 1.0 | °C/W |

*4 : Channel-case

Specifications are subject to change without notice

| | | |
|--------|---------|-------|
| ESD *5 | Class 0 | -199~ |
|--------|---------|-------|

*5 : Based on EIAJ ED-4701 C-111A(C=100pF, R=1.5kΩ)

MGFK48G2732A

Ku band internally matched power GaN HEMT

12.75 – 13.25 GHz BAND / 70W Multi-carrier operable

Keep safety first in your circuit designs!

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi Electric Semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Electric Semiconductor product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Electric Semiconductor home page (<http://www.MitsubishiElectric.com/semiconductor/>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Electric Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or re-export contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Electric Semiconductor product distributor for further details on these materials or the products contained therein.

Note: This product is based on results obtained from a project subsidized by the New Energy and Industrial Technology Development Organization (NEDO).